


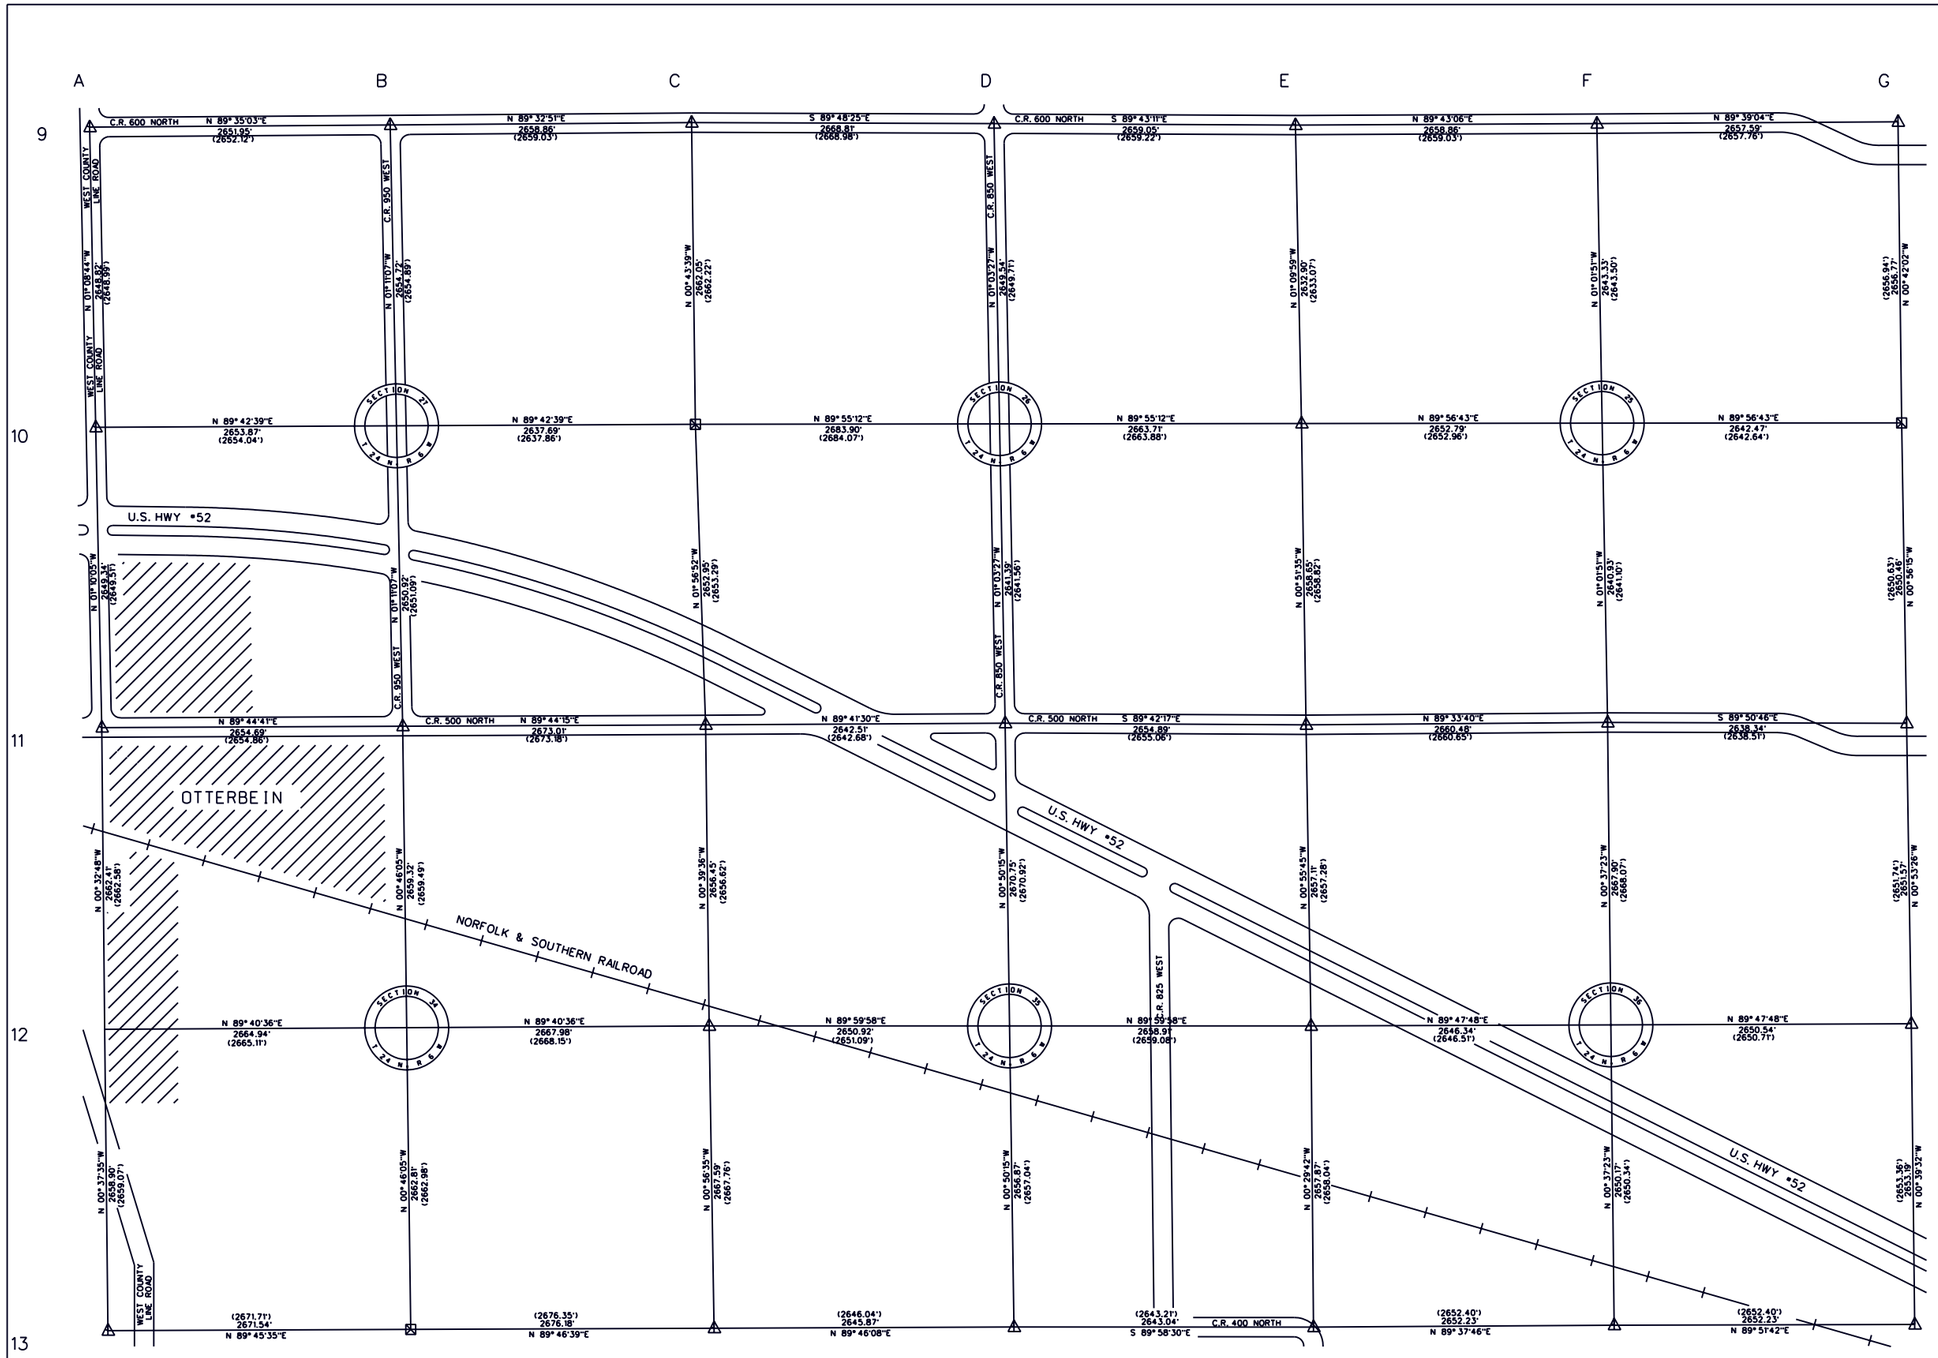


| NAD 83(86) COORDINATES (U. S. SURVEY FEET) | | |
|---|---|---|
| GRID | NORTH | EAST |
| A-9 | 1914625.916 | 2949720.836 |
| B-9 | 1914645.169 | 2952372.715 |
| C-9 | 1914666.162 | 2955031.494 |
| D-9 | 1914657.166 | 2957700.288 |
| E-9 | 1914644.161 | 2960359.301 |
| F-9 | 1914657.233 | 2963018.128 |
| G-9 | 1914673.419 | 2965675.666 |
| A-10 | 1911977.622 | 2949773.798 |
| B-10 | 1911991.015 | 2952427.632 |
| C-10 | 1912004.326 | 2955065.288 |
| D-10 | 1912008.079 | 2957749.185 |
| E-10 | 1912011.804 | 2960412.894 |
| F-10 | 1912014.331 | 2963065.678 |
| G-10 | 1912016.849 | 2965708.151 |
| A-11 | 1909328.830 | 2949827.811 |
| B-11 | 1909340.664 | 2952482.470 |
| C-11 | 1909352.909 | 2955155.455 |
| D-11 | 1909367.135 | 2957797.932 |
| E-11 | 1909353.457 | 2960452.787 |
| F-11 | 1909373.830 | 2963113.185 |
| G-11 | 1909366.743 | 2965751.520 |
| A-12 | 1906666.541 | 2949853.220 |
| B-12 | 1906681.581 | 2952518.112 |
| C-12 | 1906696.638 | 2955186.052 |
| D-12 | 1906696.668 | 2957836.971 |
| E-12 | 1906696.698 | 2960495.879 |
| F-12 | 1906706.087 | 2963142.199 |
| G-12 | 1906715.492 | 2965792.726 |
| A-13 | 1904007.804 | 2949882.289 |
| B-13 | 1904019.014 | 2952553.801 |
| C-13 | 1904029.405 | 2955229.961 |
| D-13 | 1904040.079 | 2957875.808 |
| E-13 | 1904038.931 | 2960518.846 |
| F-13 | 1904056.079 | 2963171.019 |
| G-13 | 1904062.482 | 2965823.242 |

NOTE: SECTION CENTERS ARE COMPUTED FOR INFORMATION AND REFERENCE PURPOSES. LOCAL EVIDENCE (IF ANY) SHOULD BE EVALUATED IN EACH SECTION.

Theoretical Uncertainty (TU) of measurements = 0.30' (radius). reference: Title 865 IAC 1-12-8

DOSSIERS CONTAINING INFORMATION NECESSARY FOR RECOVERY AND USE OF SECTION CORNER MONUMENTATION AVAILABLE FROM PROJECT OFFICE.

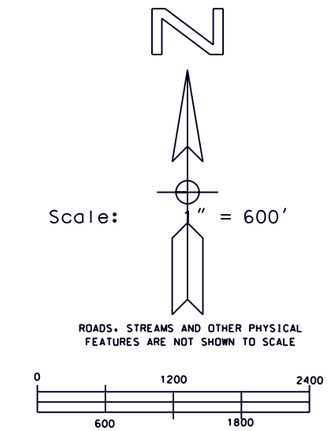Dale L. Grimes, PLS •S0452

## LEGEND

△ CORNER MONUMENT SET - BERNTSEN A1NB, RT-1 OR D-1 ALUMINUM MONUMENT

+ NO MONUMENT FOUND / SET SEE CORNER DOSSIER

⊠ OTHER MONUMENTATION FOUND / SET SEE CORNER DOSSIER

HORIZONTAL DATUM IS BASED ON THE INDIANA STATE PLANE COORDINATE SYSTEM, WEST ZONE. ALL BEARINGS ARE REFERENCED TO GRID NORTH.

COMBINATION SCALE AND SEA LEVEL REDUCTION FACTOR: 0.9999355

DIMENSIONS SHOWN IN PARENTHESIS INDICATE GROUND LEVEL DISTANCES.

TIPPECANOE COUNTY SECTION CORNER PERPETUATION PROJECT

MICHAEL J. SPENCER, COUNTY SURVEYOR
DALE L. GRIMES, PLS, PROJECT MANAGER
COUNTY OFFICE BUILDING
20 N. THIRD STREET
LAFAYETTE, INDIANA 47901
(317) 423-9262

TIPPECANOE COUNTY BOARD OF COMMISSIONERS: • JOHN KNOCHEL • KATHLEEN HUDSON • RUTH SHEDD •

DALE L. GRIMES REGISTERED No. S 0452 STATE OF INDIANA LAND SURVEYOR

TOWNSHIP 24 NORTH, RANGE 6 WEST
SHELBY TOWNSHIP - TIPPECANOE COUNTY, INDIANA

| | | |
|---|---|---|
| COMPUTED BY: Dale L. Grimes | RESEARCH BY: Anthony S. Ross | SHEET |
| DRAWN BY: Dale L. Grimes | DATE: 10 JUNE 1998 | 24-6-F |
| FIELD WORK: Grimes, Ross | | |
| FROM: May 1997 | TO: October 1997 | PLOT DATE: 12 JANUARY 1999 |